

THE JAM JAR JET

By William Gurstelle

Don't think you can build a jet engine at home? Here's a simple jet engine — a pulsejet — that you can make out of a jam jar in an afternoon. All it takes is bending some wire and punching a few holes. >>>

Set up: p.105 Make it: p.106 Use it: p.109

JOIN THE JET SET

Turbojets and fanjets contain hundreds of rotating parts. But the ancestors of these designs, called pulsejets, convert fuel and air into propulsive force by using a fixed geometry of chambers and ducts, with no moving parts. The simplest pulsejet is the Reynst combustor, which uses one opening for both air intake and exhaust.

The pioneering Swiss jet engineer Francois Reynst discovered this combustor as a pyromaniac child. He perforated the lid of a glass jar, put a small amount of alcohol inside, and lit the top. Flames shot out of the hole and then were sucked back into the bottle before being ejected again. This almost-magical process repeated until all of the fuel was expended. Reynst had discovered a jar that literally breathed fire, like St. George's dragon. Our jam jar jet is based on Reynst's discovery.

William Gurstelle enjoys making interesting things that go whoosh then splat. He is the author of *Backyard Ballistics* (2001), *Building Bots* (2002), and *The Art of the Catapult* (2004). Visit backyard-ballistics.com for more information.

HOW IT WORKS

When the fuel and air inside the jar first ignite, the jam jar jet generates a burst of hot gas, raising the internal pressure and pushing the gas out. The exiting gas leaves a slight vacuum behind, and fresh air rushes back into the jar to fill the void. More methanol mixes with the fresh air in the still-hot jar, triggering another combustion. Scientists call the resulting cycle relaxation oscillation.



The V-1

The pulsejet engine is simple, cheap, and powerful, but isn't used in commercial aviation because large versions are incredibly noisy, and they vibrate like gigantic, unbalanced chain saws. Invented in the early 20th century, pulsejet engines had no practical use until German scientist Paul Schmidt developed a no-frills but dependable pulsejet-powered cruise missile. This was the notorious V-1 rocket, a.k.a. the "buzz bomb," which terrorized Britain during World War II.

The V-1 was a 25-foot tube with two stubby wings. Its simple engine gave the missile a range of about 150 miles with an explosive payload of nearly a ton. The first V-1 hit London on June 12, 1943. At the height of their use, 190 were launched daily. The V-1 attacks ended only when the Allies marched back through Europe, and seized the missiles' launch sites, which were located across the English Channel.

INTAKE AND EXHAUST


A ½" diameter hole drilled in the center of the Mason jar lid serves as both the air intake and exhaust port. Most functional pulsejet engine designs use two separate ports, but because the combustion cycle's intake and exhaust stages are not simultaneous, pulsejets can also use a single port. The continuous combustion cycles of more advanced jet engines, such as turbojets, require separate intake and exhaust ports.

HEAT DIFFUSION


The copper diffuser also conducts heat and transfers it out to the four wires that it hangs from. The long wires radiate heat to the air outside, which takes some thermal expansion strain off the jar, reducing the risk of cracking the glass.

AIR FLOW

Inside the jar, a conical copper diffuser ring guides the flow of the gases so that they follow a simple whirl pattern. This improves the efficiency of the combustion cycle.

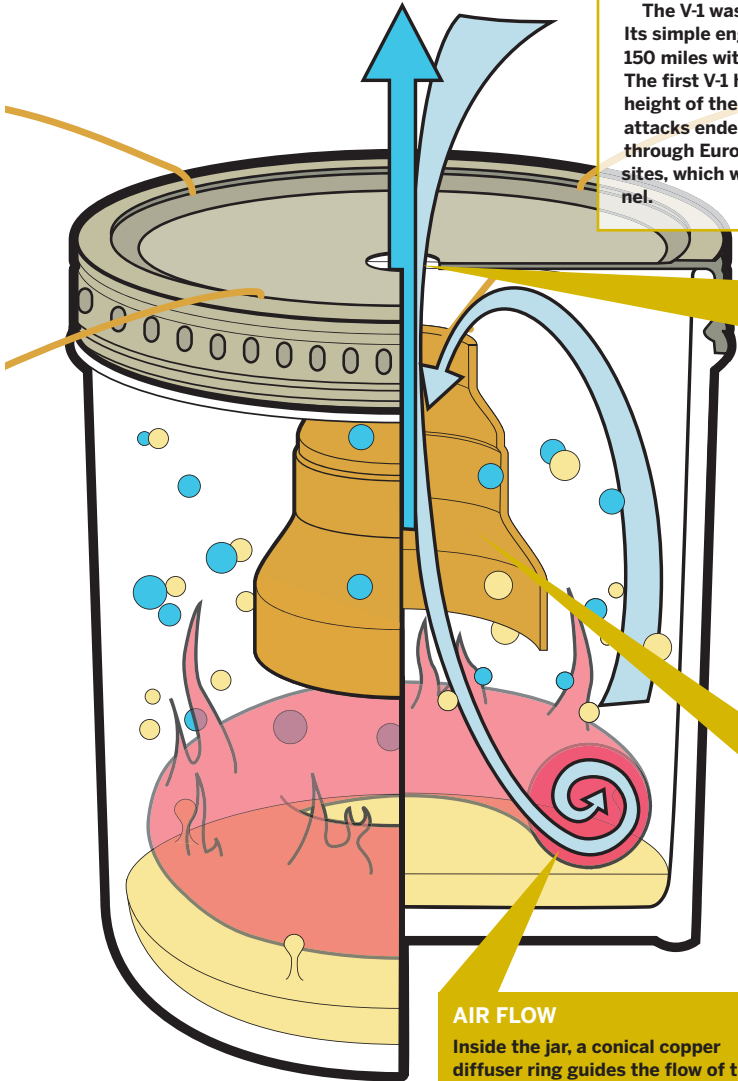

SET UP.

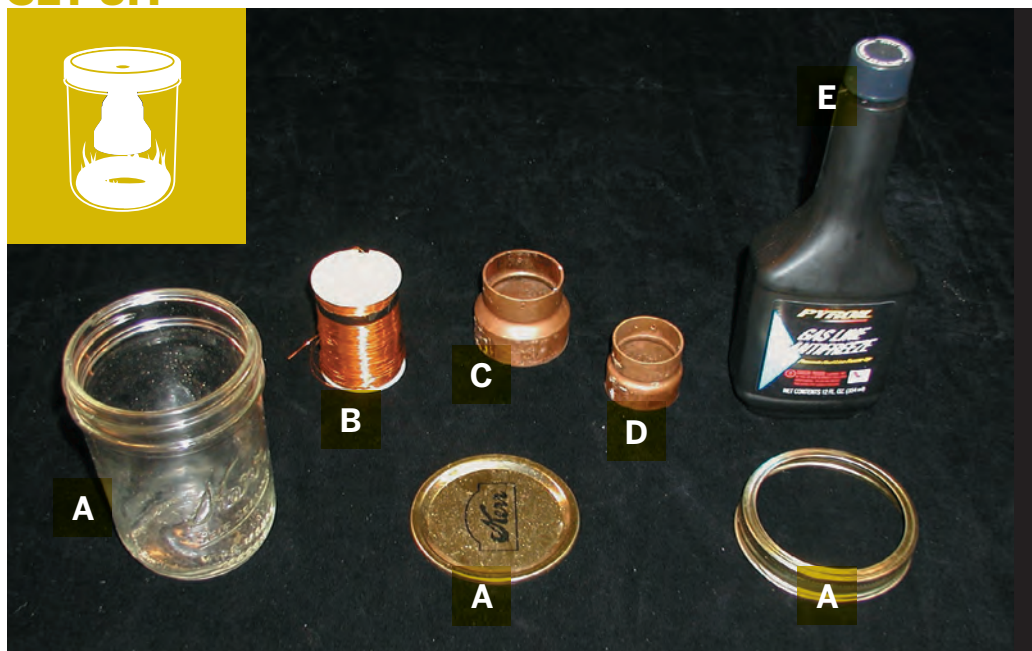

MATERIALS

[A] Pint-sized Mason jar with extra screw caps and lids

[B] 22- to 26-gauge magnet wire (thin enamel-coated copper)

[C] 1½" to 1¼" copper drain/waste/vent (DWV) reducing fitting

[D] 1¼" to 1" copper DWV reducing fitting Available at home centers or hardware stores. These two pipe fittings are for the conical air diffuser.

[E] Small bottle of methanol Available at auto supply stores as gas-line antifreeze; common brands include Heet and Pyroil. Methanol absorbs water readily, which is why it works well as gas-line antifreeze. But this property also causes it to go bad quickly, so you should always use fresh methanol.

[NOT SHOWN]

Package of long fireplace matches, or a long-handled barbeque lighter

Table salt (optional)

Boric acid crystals (optional)

1' long, 1" diameter plastic or metal pipe (optional)

Optional items are for experimental variations.

TOOLS

Electric drill with ½" and ⅜" drill bits

Wire cutters

File or sandpaper

Teaspoon measure

Cookie sheet

Refrigerator/freezer

Safety glasses

Gloves

SAFETY GUIDELINES

This is a jet engine you're building, a tempest in a teapot. I've never had any problems with this design, but no one — not me, not this magazine — can guarantee your safety. If you do choose to go forward with this project, here are some important safety measures.

1. Do not experiment with different sized jars and openings. A too-large jar with a too-small opening might result in an explosion of glass shards.
2. Use no more and no less fuel than directed. Wipe up any spilled fuel immediately.
3. Use only the parts listed in the directions. These are proven to work safely, and I haven't tried or analyzed all the substitutions that people might think of.
4. Wear gloves and safety glasses or goggles.
5. Do not handle the jar for 5 minutes after a successful run, and then be sure to tap it first to make sure it is cool enough. The Reynst combustor is an extremely efficient heating device, and it gets hot enough to burn skin after just a few seconds of run time.
6. After a long run, the glass jar may crack. If so, carefully sweep the engine assembly into a bag without touching it. Seal the bag and throw it in the trash. Jars are cheap enough, so just get another one.
7. Keep spectators at a safe distance.
8. Always ignite the engine with a long-handled match or barbeque lighter, to avoid getting burned by the pulse of hot gas that immediately follows ignition.
9. Examine all parts for wear before and after use. Discard any worn parts.
10. Always use common sense before, during, and after running the jam jar jet.

MAKE IT.



CONSTRUCT YOUR JAM JAR JET

START >>>

Time: An Afternoon **Complexity:** Low

1. DRILL THE PORT

Drill a $\frac{1}{2}$ " diameter hole in the lid of the jar. Use a file or sandpaper to completely remove the burr. If the hole is so jagged that it cannot be made smooth and round, discard the lid and re-drill another one.



2. DRILL THE DIFFUSER HOLES

Drill four $\frac{1}{8}$ " diameter holes in the small copper adapter. The holes should be located about $\frac{1}{4}$ " down from the smaller, 1" diameter end. Space the holes evenly around the perimeter at 90, 180, and 270 degrees from the first hole.




3. ASSEMBLE THE DIFFUSER

Insert the large end of the small copper adapter into the small end of the large copper adapter. Press-fit them together firmly. This forms the conically shaped jet diffuser and heat sink.



4. CUT THE DIFFUSER WIRES

Cut four 4" long wires from the spool of magnet wire.

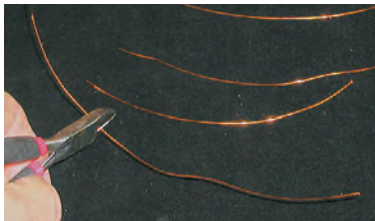

5. ATTACH THE WIRES

Loop one wire through each one of the holes you just drilled, and tie a knot. Extend the other end of the wires outward, radially, from the diffuser cone.



6. SUSPEND THE DIFFUSER

Center the copper diffuser in the middle of the jar. Crimp the wires over the edge of the jar so that the cone hangs suspended close to the top of the jar, with a gap of about $\frac{1}{4}$ " between the diffuser and the top.



7. ADD THE FUEL

Carefully pour or use an eye-dropper to measure and add 5 to 10ml (roughly 1-2 teaspoons) of methanol into the bottom of the jar. You can vary the amount of methanol by a small amount to improve performance. At most, the methanol should just cover the bottom of the jar.

8. CLOSE THE JAR

Screw the Mason jar lid down onto the jar and over the copper wires. The lid will hold the diffuser cone securely in place at the top of the jar.



9. VAPORIZE SOME OF THE FUEL

Prepare the jar by letting it sit in the freezer for two minutes. Hold your thumb over the opening in the lid. Vigorously swirl and shake the methanol inside the jar. Place the jam jar jet on a cookie sheet and place the cookie sheet on a secure surface, away from any flammable objects.



NOTE: When you remove your finger from the hole, you should notice a slight pressure release, and the jar should make a very faint “pffft” sound. If you feel no slight pressure and hear no sound, shake the jar again. If there is still no pressure, there is a leak in the seal of the jar that you’ll need to fix.

10. FIRE IT UP

Wearing safety glasses and gloves, hold a flame over the opening in the jar’s lid.

The fuel will ignite, and for the next 5 to 15 seconds, the jam jar jet will cycle, pulse, and buzz, running at a low but audible frequency of about 20Hz, depending on conditions in the jar and in the surrounding air. With the lights down low, you’ll enjoy a noisy, deep blue pulse of flame that grows and shrinks under the lid as the jar breathes fire. It’s an amazing effect.



Pint-Sized Fireworks

During the air-intake part of the cycle, the bottom of the jam jar jet glows brightly. The photo on page 102 shows the blue flame you’ll get from burning straight methanol, and this photo (at right) shows the yellow variant that comes from adding a little salt to the fuel. By adding salt or boric acid crystals, you can color your flames in a variety of attractive, retina-burning hues, as described on the next page.



USE IT.



TIPS AND TRICKS FOR YOUR JAM JAR JET

FLAMBÉ RECIPES

Here are some interesting variations on the jam jar jet that you can experiment with:

1. For a bright yellow flame instead of the blue, add a pinch of table salt to the methanol.
2. For green-colored flame, add a pinch of boric acid crystals to the methanol.
3. To amplify the sound of the jet, hold a tube a half inch or so above the hole. You can use a metal or plastic pipe, and even the cardboard from a roll of paper towels will last a little while.

Use pliers or a gloved hand to hold the tube in position. Experiment with the length and diameter of the tube. When the size is right, you'll be rewarded with an unmistakably loud, deep, resonant buzz.

4. Some enthusiasts make Reynst combustors with metal jars instead of glass, and outfit them with resonator tubes permanently attached above the hole. These are sometimes termed "snorkelers."

The most advanced snorkelers also have fuel-feed systems that drip methanol into the combustion chamber, which allows them to sustain combustion for long periods of time.

TROUBLESHOOTING

If the methanol burns with a single big whoosh instead of pulsing:

- » Check the size of the hole and make sure it is accurately drilled to a 1/2" diameter.
- » Be sure to place the jar in the freezer for two minutes before lighting. In my experience, slightly cooling the fuel and the jar improves performance.

- » Make certain the jar is charged with the recommended amount and type of fuel.

If you hold the long match over the opening and it doesn't ignite, or it does ignite but the pulse is weak:

- » Make sure the methanol is fresh.
- » Cool down the jar in the freezer for two minutes.
- » Start with just one teaspoonful of fuel in the bottom, and vary the amount slightly until you get better performance results.

- » Check the seal by listening for the "pffft" when you remove your finger from the hole. If necessary, rejigger the lid to get a good seal.

- » Reposition the diffuser by adjusting the support wires, or try shortening the diffuser by removing the bottom section.

If the jar cracks:

- » Carefully dispose of the broken jar and replace it with another one of the same size. The Reynst combustor/pulsejet is a very efficient burner and therefore extracts a lot of heat from the fuel very quickly. If the jar you're using cannot handle the rapid expansion, it will crack.

RESOURCES

Pulsating Combustion: The Collected Works of F.H. Reynst, Pergamon Press, 1961

Homemade pulsejets webpage and discussion forum: pulse-jets.com

Larry Cottrill's *jetZILLA*, an online magazine of amateur jet propulsion: jetzilla.com